


REV	DESCRIPTION	DATE	CHK. BY	APPROVED
△				
△				
△				

WIRE CALIBER TOLERANCE		MACHINING TOLERANCE		
DIMENSION	TOLERANCE	DIMENSION	TOLERANCE	
L (INCH)	±	L (mm)	A	B C
L≤4	0.25	L≤5	0.10	0.15 0.20
4<L≤12	0.5	5<L≤15	0.15	0.20 0.25
12<L≤36	1	15<L≤30	0.20	0.25 0.34
36<L≤60	1.5	30<L≤50	0.25	0.33 0.45
60<L≤80	2	50<L≤70	0.30	0.40 0.55
80<L≤120	2.5	70<L≤90	0.35	0.48 0.62
120<L≤180	3	90<L≤120	0.40	0.58 0.68
180<L	4	120<L	0.45	0.65 0.75
STRIPPED&TINNED				
BARE COPPER				
0.25"(6.5mm)±1mm				

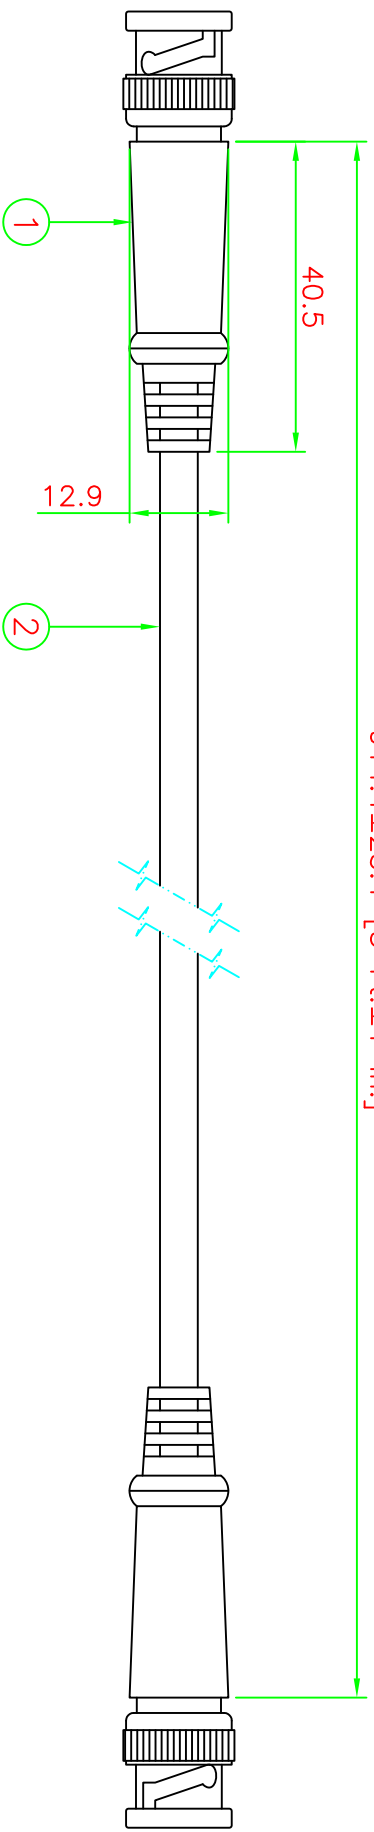

ROHS

WIRING:
 CENTER ——— CENTER
 SHELL ——— SHELL

CT Cabletree Industrial Co., Ltd.

ITEM	VENDOR	PART NO	QTY	DESCRIPTION
02	-	UL1365 E156277	0.92M	CABLE:P:Printing:"RG-58/U COAXIAL CABLE",color:Black
01	-	-	2	BNC MALE PLUG:Molding color:Black

CUST:	CUST P/N: -
UNIT SCALE	PERSPECTIVE
mm (ft.)	1:1
DWN.BY	CHK. BY
MARK	KELLY
TITLE:	BNC Coaxial Cable Ass'y.
CT P/N:	CT005988
APPROVER	DATE
SEP/22/2014	REV
A	SHEET
1 OF 1	