


REV	DESCRIPTION	DATE	CHK. BY	APPROVED
△				
△				
△				

WIRE CALBE TOLERANCE		MACHINING TOLERANCE	
DIMENSION	TOLERANCE	DIMENSION	TOLERANCE
L (INCH)	±	L (mm)	A B C
L≤4	0.25	L≤5	0.10 0.15 0.20
4<L≤12	0.5	5<L≤15	0.15 0.20 0.25
12<L≤36	1	15<L≤30	0.20 0.25 0.34
36<L≤60	1.5	30<L≤50	0.25 0.33 0.45
60<L≤80	2	50<L≤70	0.30 0.40 0.55
80<L≤120	2.5	70<L≤90	0.35 0.48 0.62
120<L≤180	3	90<L≤120	0.40 0.58 0.68
180<L	4	120<L	0.45 0.65 0.75
STRIPPED&TINNED			
BARE COPPER			
0.25"(6.5mm)±1mm			

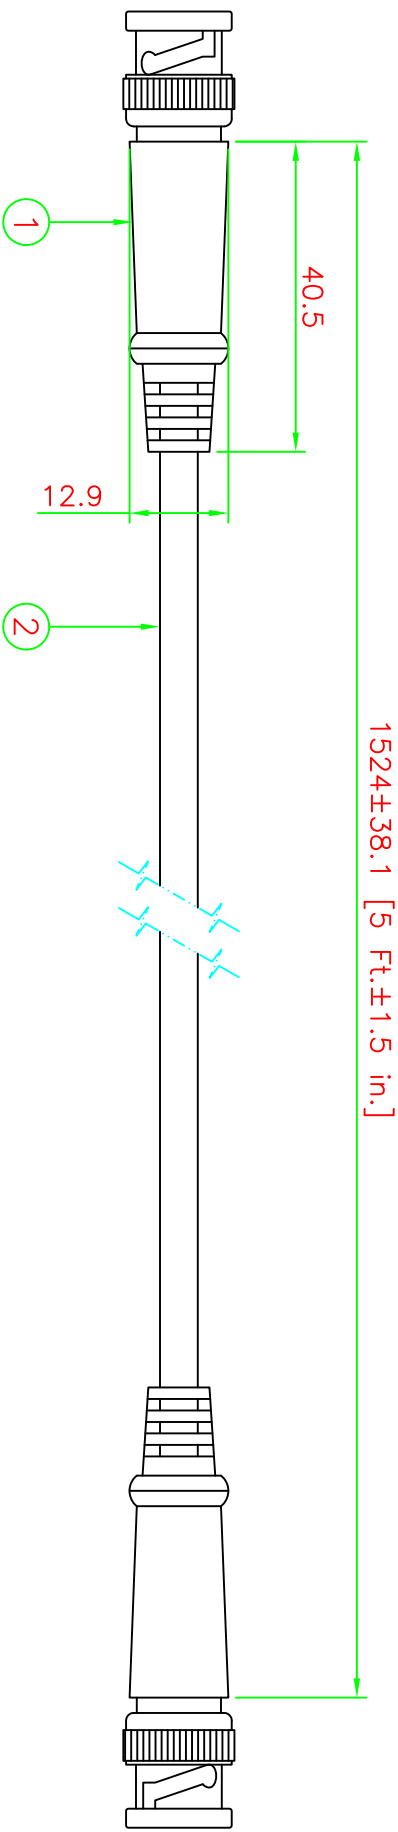

ROHS

WIRING:  
 CENTER ——— CENTER  
 SHELL ——— SHELL

ITEM	VENDOR	PART NO	QTY	DESCRIPTION
02	-	UL1365 E156277	1.53M	CABLE:P:Printing:"RG-58/U COAXIAL CABLE",color:Black
01	-	-	2	BNC MALE PLUG:Molding color:Black

**CT** Cabletree Industrial Co., Ltd.

CUST: \_\_\_\_\_ CUST P/N: -

UNIT	SCALE	PERSPECTIVE	TITLE: BNC Coaxial Cable Ass'y.
mm (ft.)	1:1	ISO	CT P/N: CT005989
DWN. BY	CHK. BY	APPROVER	DATE
MARK	KELLY		SEP/22/2014

REV SHEET 1 OF 1