
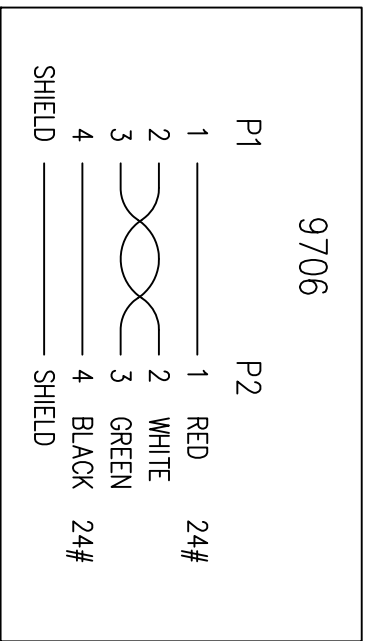


DIMENSION L (INCH)	TOLERANCE	MACHINING TOLERANCE			
		L (mm)	A	B	C
1.5<L 4	± 0.25	1.5<L 5	0.10	0.15	0.20
4<L ≤ 12	0.5	5<L ≤ 15	0.15	0.20	0.25
12<L ≤ 36	1	15<L ≤ 30	0.20	0.25	0.34
36<L ≤ 60	1.5	30<L ≤ 50	0.25	0.33	0.45
60<L ≤ 80	2	50<L ≤ 70	0.30	0.40	0.55
80<L ≤ 120	2.5	70<L ≤ 90	0.35	0.48	0.62
120<L ≤ 180	3	90<L ≤ 120	0.40	0.58	0.68
180<L	4	120<L	0.45	0.65	0.75

STRIPPED/EXTENDED
BARE COPPER
0.25" (6.5mm) ± 0.1mm

REV	DESCRIPTION	DATE	CHK. BY	APPROVED

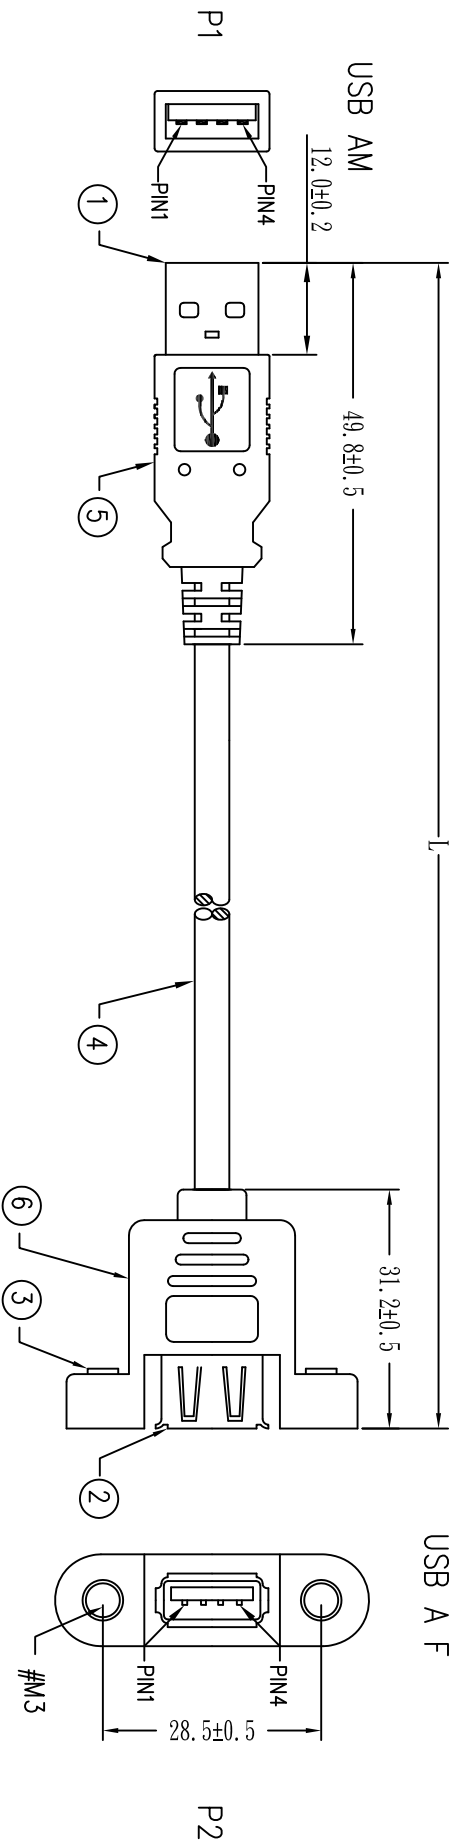

* NOTE: All relevant materials are complied with RoHS directive .

No.	DESCRIPTION	Q'TY	Supplier
1	BLACK HEAT SHIRK TUBE Ø1.0*8mm	1	M959
2	MOLDED PE COLOR TRANSPARENT		M280
3	MOLDED PVC BEIGE		M304
4	USB 2.0 CABLE, UL STYLE 1 TWISTED PAIR 28AWG AND 2C 24AWG, OD 4.5mm, JACKET BEIGE, DRAWING No. EUBR2801P2402C-015	670mm	M304
5	HEX-NUT 5*7.7mm, #4-40	2	M95
6	USB A FEMALE 2.0, GOLD PLATING 30" ON CONTACTS, WHITE INSULATOR	1set	M108
7	USB A MALE 2.0, GOLD PLATING 30" ON CONTACTS, WHITE INSULATOR, SHORT A PIERCE TYPE	1set	M108

Cabletree Industrial Co., Ltd.

CUST. P/N: -	CUST. P/N: -
UNIT SCALE: 1:1	PERSPECTIVE:
TITLE: USB-AM to USB-AF(M3x2)	CT P/N: 9706
APPROVER: KELLY	DATE: JAN/19/2012
REV: A	SHEET: 1 OF 1