



WIRE GAUGE TOLERANCE		MACHINING TOLERANCE		
DIMENSION	TOLERANCE	DIMENSION	TOLERANCE	TOLERANCE
L (INCH)		L (mm)	A	B C
1 ≤ L < 4	± 0.25	1 ≤ L ≤ 5	± 0.10	± 0.15 ± 0.20
4 < L ≤ 12	0.5	5 < L ≤ 15	± 0.15	± 0.20 ± 0.25
12 < L ≤ 36	1	15 < L ≤ 30	± 0.20	± 0.25 ± 0.34
36 < L ≤ 60	1.5	30 < L ≤ 60	± 0.25	± 0.33 ± 0.45
60 < L ≤ 80	2	50 < L ≤ 70	± 0.30	± 0.40 ± 0.55
80 < L ≤ 120	2.5	70 < L ≤ 90	± 0.35	± 0.48 ± 0.62
120 < L ≤ 180	3	90 < L ≤ 120	± 0.40	± 0.58 ± 0.68
180 < L	4	120 < L	± 0.45	± 0.65 ± 0.75


STRIPPED&TINNED  
 BARE COPPER  
 0.25 (6.3mm) ± 1mm

USB BF

REV	DESCRIPTION	DATE	CHK. BY	APPROVED

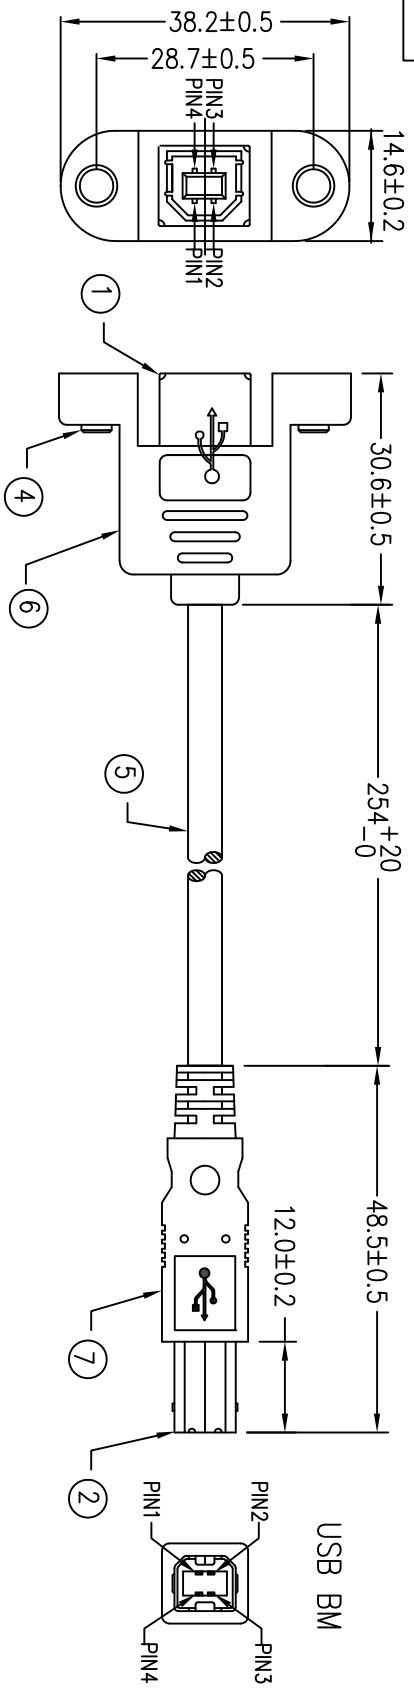

SCREW 5.5\*8mm(2pcs) INSIDE SELF-GIVEN PAG

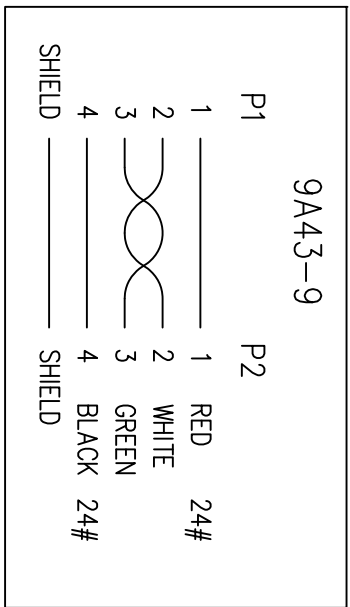

NOTE: All relevant materials are complied with RoHS directive.

No.	DESCRIPTION	QTY	Supplier
1	USB B FEMALE 2.0, GOLD PLATING 300° ON CONTACTS, WHITE INSULATOR A1HD03-0108	1	M108
2	USB B MALE 2.0, GOLD PLATING 300° ON CONTACTS, WHITE INSULATOR, SHORT A PERCE TYPE A1HB16-0108	1	M108
3	SCREW 5.5*8mm, #4-40	2	M95
4	HEX-NUT 5*7.7mm, #4-40	2	M95
5	OD 4.5mm, JACKET BLACK, DRAWING No. EVAE2801P2402C-015	325mm	M304
6	MOLDED PVC BLACK		M304
7	MOLDED PVC BLACK		M304

**CI** Cabletree Industrial Co., Ltd.

CUST: KND  
 UNIT SCALE: 1:1  
 DRW BY: MARK  
 CHK. BY: KELLY

CUST P/N: -  
 TITLE: USB-BM to USB-BF (#4-40x2)  
 CT P/N: 9A43-9  
 APPROVER: [Signature]  
 DATE: JUN/27/2012

REV: A  
 SHEET: 1 OF 1