WIRE CALBE TOLERANCE		MACHINING TOLERANCE			
DIMENSION L (INCH)	TOLERANCE ±	DIMENSION L (mm)	TOLERANCE Ⓐ	B	C
L≤4	0.25	L≤5	0.10	0.15	0.20
4<L≤12	0.5	5<L≤15	0.15	0.20	0.25
12<L≤36	1	15<L≤30	0.20	0.25	0.34
36<L≤60	1.5	30<L≤50	0.25	0.33	0.45
60<L≤80	2	50<L≤70	0.30	0.40	0.55
80<L≤120	2.5	70<L≤90	0.35	0.48	0.62
120<L≤180	3	90<L≤120	0.40	0.58	0.68
180<L	4	120<L	0.45	0.65	0.75

STRIPPED&TINNED
BARE COPPER
0.25"(6.5mm)±1mm

REV	DESCRIPTION	DATE	CHK. BY	APPROVED
△				
△				
△				

Specification :

Contact resistance: 20m ohm max. (initial)
Insulation resistance: 100M ohm min. (at 500V DC)
Dielectric strength: 1,500V AC 50/60 Hz for 1 minute
Service life: Mechanically: 100,000 operations min.
Electrically: 10,000 operations min.
Waterproof rating: IP68 Level
Rating : 12A 125V AC/ 10A 250V AC
½HP 125V AC/ 1HP 250V AC/5A 125V AC "L"
Circuit: OFF – ON DPST
Keyway Position

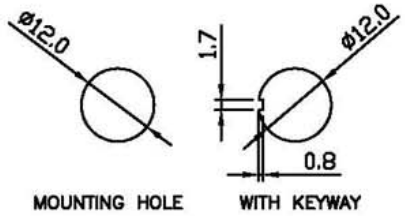



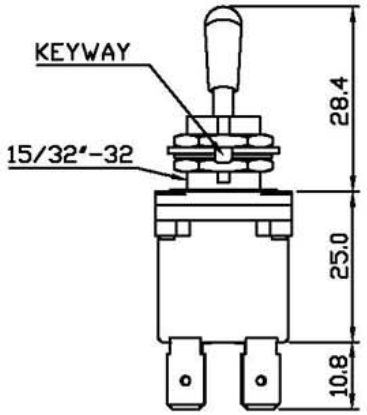

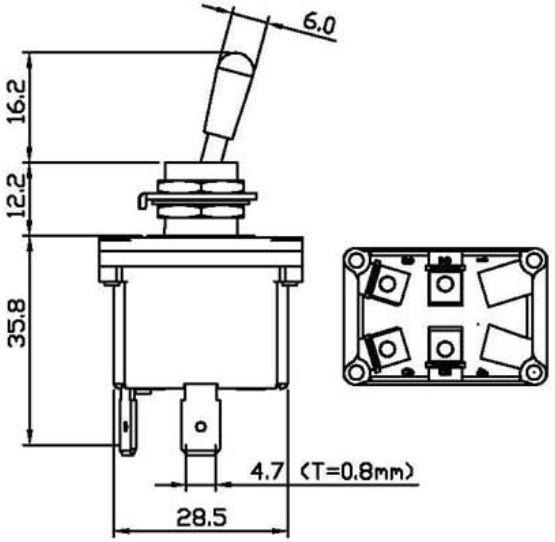

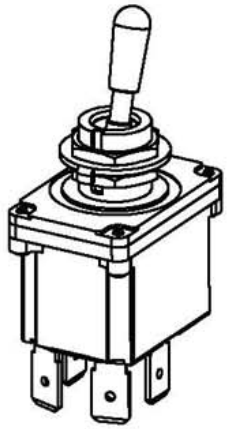

Cabletree Industrial Co., Ltd.

CUST: KND			CUST P/N: –			
UNIT: mm	SCALE: 1:1	PERSPECTIVE	TITLE: Waterproof toggle switch			
			CT P/N: TB4–B12			
DWN.BY: MARK	CHK. BY: KETTY		APPROVER	DATE: APR/01/2011	REV: A	SHEET: 1 OF 1