
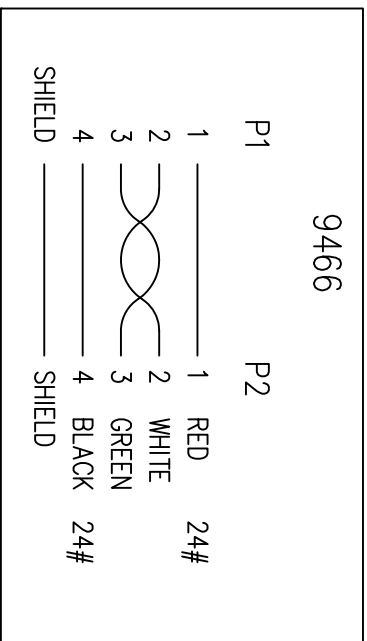


WIRE CALIBRE TOLERANCE	MACHINING TOLERANCE				
	TOLERANCE	TOLERANCE			
DIMENSION	L (mm)	A	B	C	
L (INCH)					
1.5 <= 4	± 0.25	1.5 <= 5	0.10	0.15	0.20
4 <= 12	0.5	5 <= 15	0.15	0.20	0.25
12 <= 36	1	15 <= 30	0.20	0.25	0.34
36 <= 60	1.5	30 <= 50	0.25	0.33	0.45
60 <= 80	2	50 <= 70	0.30	0.40	0.55
80 <= 120	2.5	70 <= 90	0.35	0.48	0.62
120 <= 180	3	90 <= 120	0.40	0.58	0.68
180 <=	4	120 <=	0.45	0.65	0.75

STRIPPED/EXTENDED
 BARE COPPER
 0.25" (6.5mm ± 0.1mm)

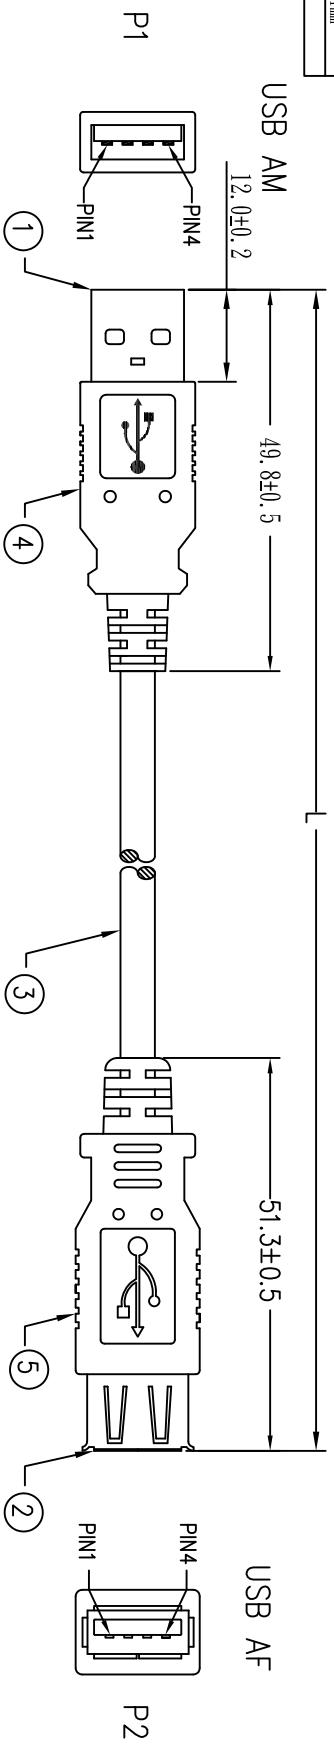

NOTE: All relevant materials are complied with RoHS directive .

5	BLACK HEAT SHIRK TUBE ϕ 1.0*10mm	1	M743
	MOLDED PE COLOR TRANSPARENT		M280
	MOLDED PVC BEIGE		M304
4	MOLDED PVC BEIGE		M304
3	USB 2.0 CABLE, UL STYLE 1 TWISTED PAIR 28AWG AND 2C 24AWG, OD 4.5mm, JACKET BEIGE, DRAWING No. EUAB2801P2402C-015	L-20mm	M304
2	USB A FEMALE 2.0, GOLD PLATING 30U" ON CONTACTS, WHITE INSULATOR	1	M108
1	USB A MALE 2.0, GOLD PLATING 30U" ON CONTACTS, WHITE INSULATOR, SHORT A PIERCE TYPE	1set	M108
No.	DESCRIPTION	Q'TY	Supplier

REV	DESCRIPTION	DATE	CHK. BY	APPROVED

Cabletree Industrial Co., Ltd.

CUST: KIND

UNIT SCALE

PERPECTIVE

mm 1:1

DWN. BY: MARK

CHK. BY: KELLY

CUST P/N: -

TITLE: USB-AM to USB-AF

CT P/N: 9466

APPROVER

DATE: JUN/15/2009

REV: A

SHEET: 1 OF 1