
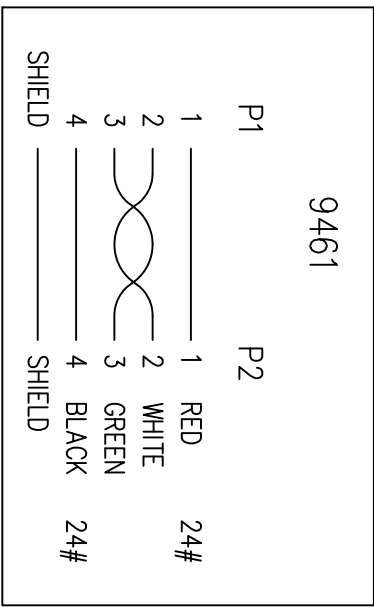


WIRE CALIBRE TOLERANCE	MACHINING TOLERANCE		
	TOLERANCE	DIMENSION	TOLERANCE
L (INCH)	±	L (mm)	A B C
1.5 ≤ L	0.25	1.5 ≤ L	0.10 0.15 0.20
4 ≤ L ≤ 12	0.5	5 ≤ L ≤ 15	0.15 0.20 0.25
12 ≤ L ≤ 36	1	15 ≤ L ≤ 30	0.20 0.25 0.34
36 ≤ L ≤ 60	1.5	30 ≤ L ≤ 50	0.25 0.33 0.45
60 ≤ L ≤ 80	2	50 ≤ L ≤ 70	0.30 0.40 0.55
80 ≤ L ≤ 120	2.5	70 ≤ L ≤ 90	0.35 0.48 0.62
120 ≤ L	3	90 ≤ L ≤ 120	0.40 0.58 0.68
180 < L	4	120 < L	0.45 0.65 0.75

STRIPPED/EXTENDED  
 BARE COPPER  
 0.25" (6.5mm) ± 1mm

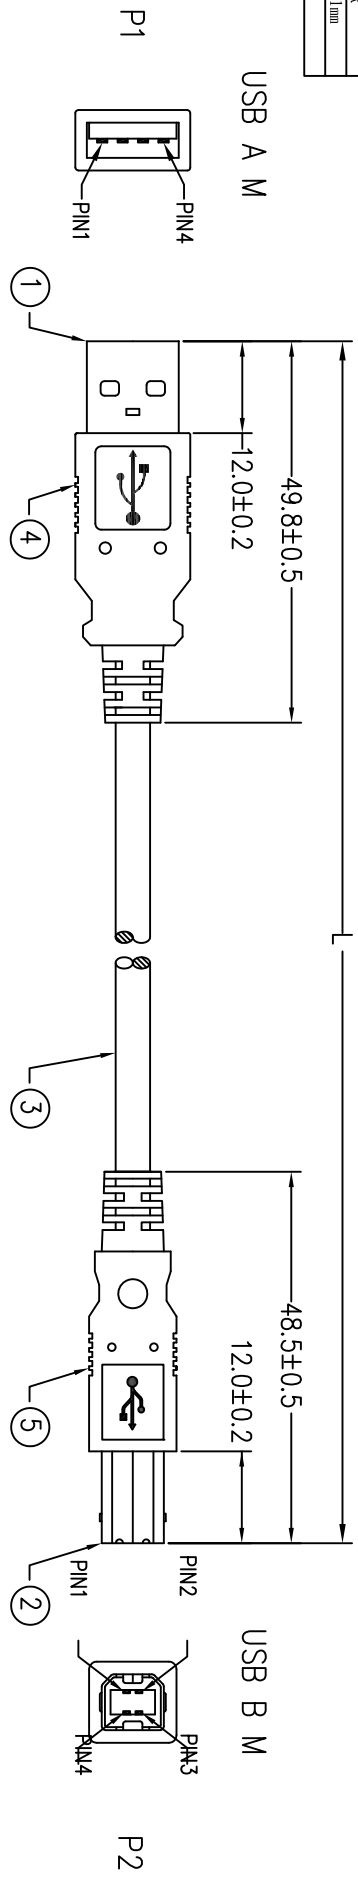

No.	DESCRIPTION	Q'TY	Supplier
5	MOLDED PVC BLACK		M304
4	MOLDED PVC BLACK		M304
3	USB 2.0 CABLE, UL STYLE 1 TWISTED PAIR 28AWG AND 2C 24AWG OD 4.5mm, JACKET BLACK, DRAWING No.EUAB2801P2402C-015	L-20mm	M304
2	USB B MALE 2.0, GOLD PLATING 30µ ON CONTACTS, WHITE INSULATOR, SHORT TYPE	1set	M108
1	USB A MALE 2.0, GOLD PLATING 30µ ON CONTACTS, WHITE INSULATOR, SHORT TYPE	1set	M108

★ NOTE: All relevant materials are complied with RoHS directive .

REV	DESCRIPTION	DATE	CHK. BY	APPROVED

**Cabletree Industrial Co., Ltd.**

CUST: KND	CUST P/N: -
UNIT SCALE	PERSPECTIVE
mm 1:1	CT P/N: 9461
DMN. BY MARK	CHK. BY KELLY
APPROVER	DATE DEC/12/2007
REV A	SHEET 1 OF 1