


DIMENSION	WIRE GAUGE TOLERANCE		MACHINING TOLERANCE			
	L (INCH)	TOLERANCE	L (mm)	A	B	C
1-5	4	± 0.25	1.5	± 0.10	± 0.15	± 0.20
4<L≤12		0.5	5<L≤15	0.15	0.20	0.25
12<L≤36		1	15<L≤30	0.20	0.25	0.34
36<L≤60		1.5	30<L≤50	0.25	0.33	0.45
60<L≤80		2	50<L≤70	0.30	0.40	0.55
80<L≤120		2.5	70<L≤90	0.35	0.48	0.62
120<L≤180		3	90<L≤120	0.40	0.58	0.68
180<L		4	120<L	0.45	0.65	0.75


STRIPPED&TINNED
BARE COPPER
0.25" (6.3mm) ±1mm

USB A F

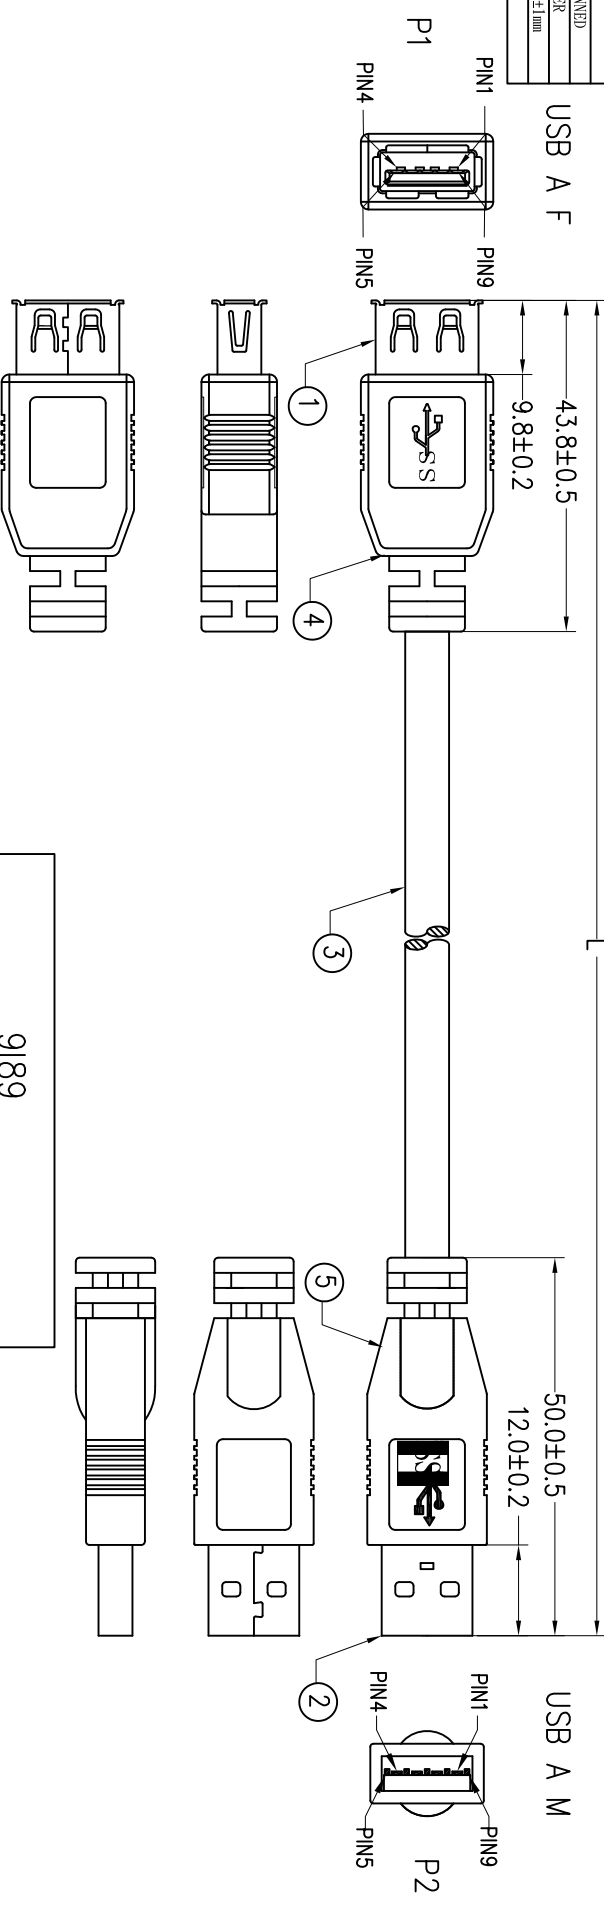

NOTE: All relevant materials are complied with RoHS directive .

No.	DESCRIPTION	QTY	Supplier
1	BLACK HEAT SHRINK TUBE ϕ 1.0*3mm	1	M743
2	BLACK HEAT SHRINK TUBE ϕ 3.0*9mm	2	M743
3	MOLDED PVC BLUE(U28)		M304
4	BLACK HEAT SHRINK TUBE ϕ 1.0*3mm	1	M743
5	BLACK HEAT SHRINK TUBE ϕ 3.0*9mm	2	M743
6	MOLDED PE COLOR TRANSPARENT		M280
7	COPPER FOIL 24*45mm	1	M304
8	USB 3.0 CABLE (28AWG*PAIR+D+H-F-AL)*2PCS+28AWG*PAIR +24AWG*2C+COPPER, BRAID(85%), OD 5.8mm JACKET BLUE(U28), DRAWING NO. EUBA2801P2802P2402C-358	X-20mm	M304
9	USB A MALE 3.0, GOLD PLATING 30u" ON CONTACTS	1set	M108
10	BLUE INSULATOR, SHORT TYPE(CHUSBS3AM01D)	1set	M108
11	USB A FEMALE 3.0, GOLD PLATING 30u" ON CONTACTS, BLUE INSULATION(CHUSBS3AF04B)	1set	M108

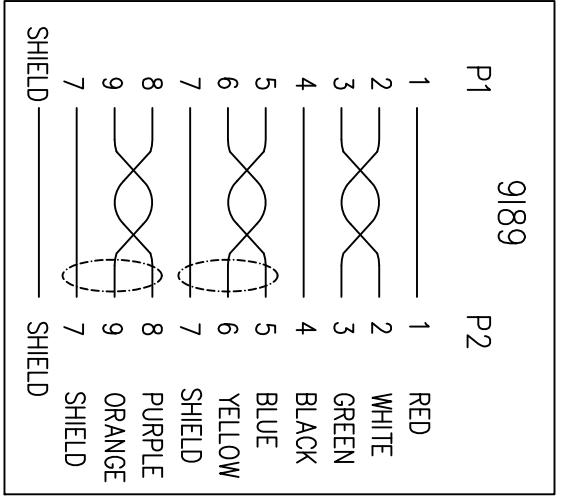

Cabletree Industrial Co., Ltd.

CUST: KIND	CUST P/N:	-
UNIT SCALE	TITLE:	USB3, 0-AM to USB3, 0-AF
mm	CT P/N:	9189
DWG BY	APPROVER	
MARK	CHK. BY	KELLY
	DATE	SEP/13/2011
	REV	A
	SHEET	1 OF 1