



WIRE GAUGE TOLERANCE		MACHINING TOLERANCE		
DIMENSION	TOLERANCE	DIMENSION L (mm)		
L (INCH)	±	①	B	C
1.5 < L < 4	0.25	±0.10	0.15	0.20
4 < L < 12	0.5	±0.15	0.20	0.25
12 < L < 36	1	±0.20	0.25	0.34
36 < L < 60	1.5	±0.25	0.33	0.45
60 < L < 80	2	±0.30	0.40	0.55
80 < L < 120	2.5	±0.35	0.48	0.62
120 < L < 180	3	±0.40	0.58	0.68
180 < L	4	±0.45	0.65	0.75

STRIPPED&TINNED
 BARE COPPER
 0.25" (6.35mm) ±1mm

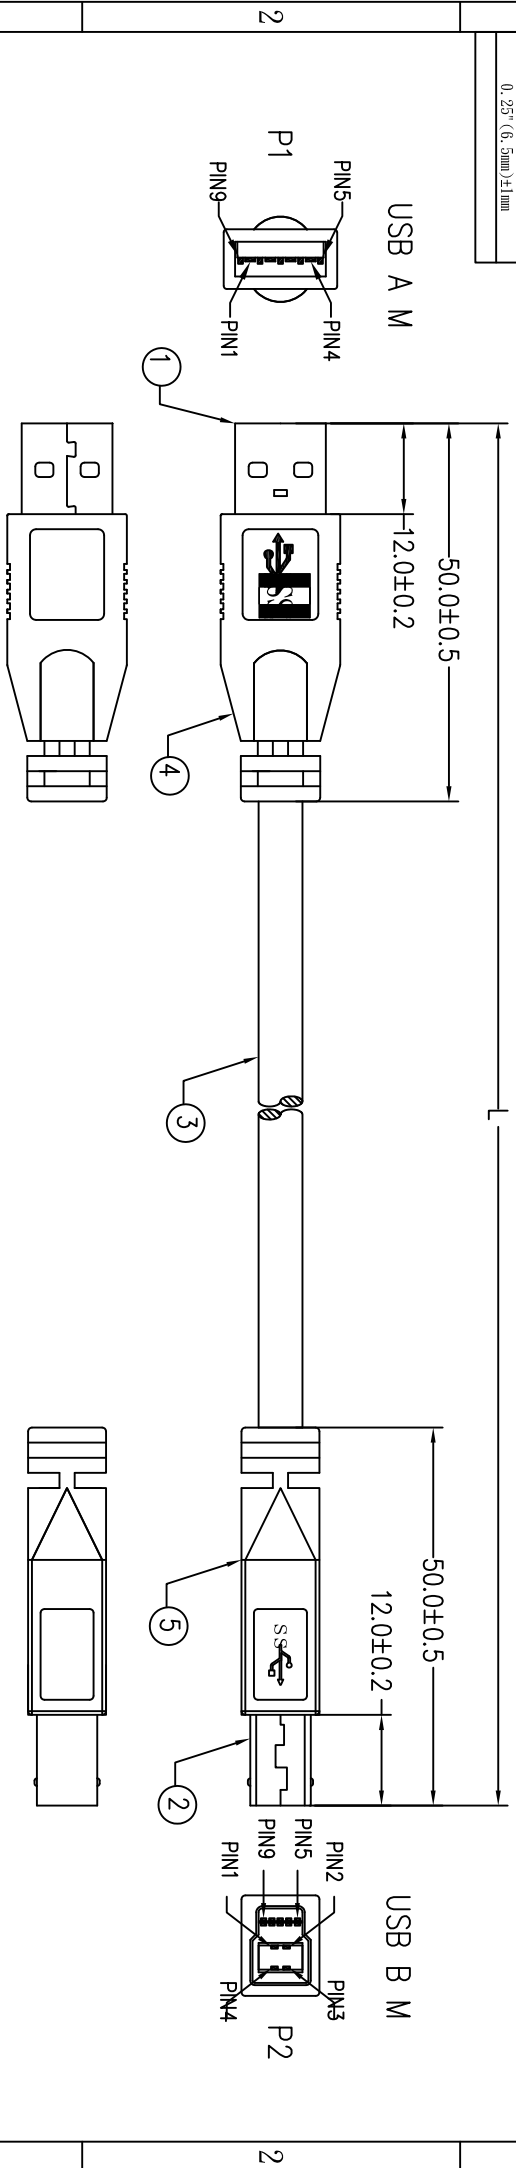

NOTE: All relevant materials are complied with RoHS directive .

No.	DESCRIPTION	QTY	Supplier
1	BLACK HEAT SHRINK TUBE ϕ 1.0*3mm	1	M743
2	BLACK HEAT SHRINK TUBE ϕ 3.0*9mm	2	M743
3	MOLDED PVC BLUE(U28)	1	M304
4	BLACK HEAT SHRINK TUBE ϕ 1.0*3mm	1	M743
5	BLACK HEAT SHRINK TUBE ϕ 3.0*9mm	2	M743
6	MOLDED PVC BLUE(U28)	1	M304
7	BLACK HEAT SHRINK TUBE ϕ 3.0*9mm	2	M743
8	MOLDED PVC BLUE(U28)	1	M304
9	USB 3.0 CABLE, 28AWG*1PAIR+(28AWG*1PAIR+DF-A1)*2PCS +24AWG*2C+COPPER, BRAID(85%), OD 5.8mm JACKET BLUE(U28), DRAWING NO. EUB2801P28022402C-358	L-20mm	M304
10	USB B MALE 3.0, GOLD PLATING 30U" ON CONTACTS BLUE INSULATOR, SHORT TYPE(CHUSB3BM02D)	1set	M108
11	USB A MALE 3.0, GOLD PLATING 30U" ON CONTACTS BLUE INSULATOR, SHORT TYPE(CHUSB3AM01D)	1set	M108

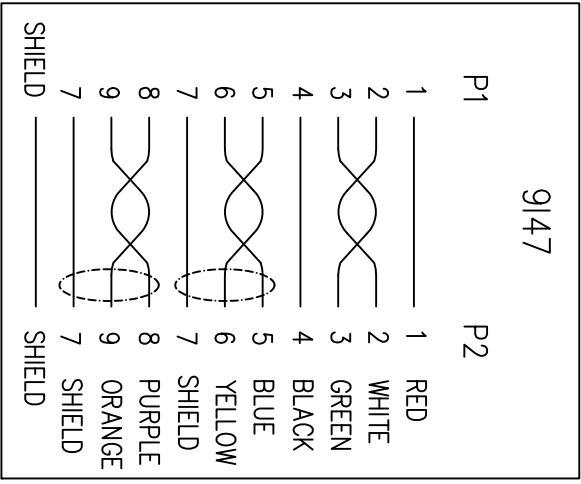

REV	DESCRIPTION	DATE	CHK. BY	APPROVED

Cabletree Industrial Co., Ltd.

CUST: KIND	CUST P/N:	XXXXX
UNIT SCALE	TITLE:	USB3, 0-AM to USB3, 0-BM
mm	CT P/N:	9147
DRW BY	APPROVER	SEP/13/2011
MARK	CHK. BY	KELLY
	DATE	
	REV	SHEET
	A	1 OF 1