
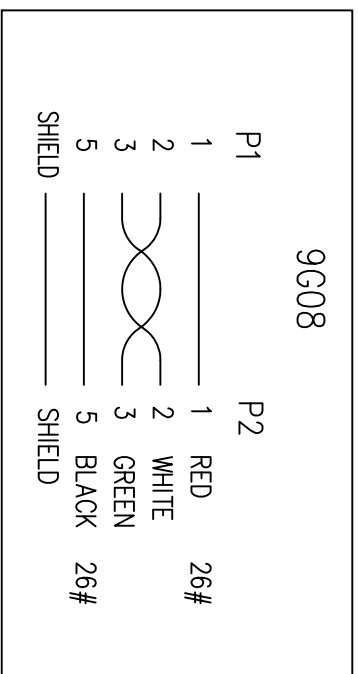


WIRE CALIBRE TOLERANCE		MACHINING TOLERANCE			
DIMENSION	TOLERANCE	DIMENSION	TOLERANCE		
L (INCH)		L (mm)	(A)	B	C
1.5 < L < 4	± 0.25	1.5 ≤ L < 5	0.10	0.15	0.20
4 < L ≤ 12	0.5	5 < L ≤ 15	0.15	0.20	0.25
12 < L ≤ 36	1	15 < L ≤ 30	0.20	0.25	0.34
36 < L ≤ 60	1.5	30 < L ≤ 50	0.25	0.33	0.45
60 < L ≤ 80	2	50 < L ≤ 70	0.30	0.40	0.55
80 < L ≤ 120	2.5	70 < L ≤ 90	0.35	0.48	0.62
120 < L ≤ 180	3	90 < L ≤ 120	0.40	0.58	0.68
180 < L	4	120 < L	0.45	0.65	0.75

STRIPE DEKRETTANVED
 BANC COPPER
 0.25" (6.5mm ± 1mm)

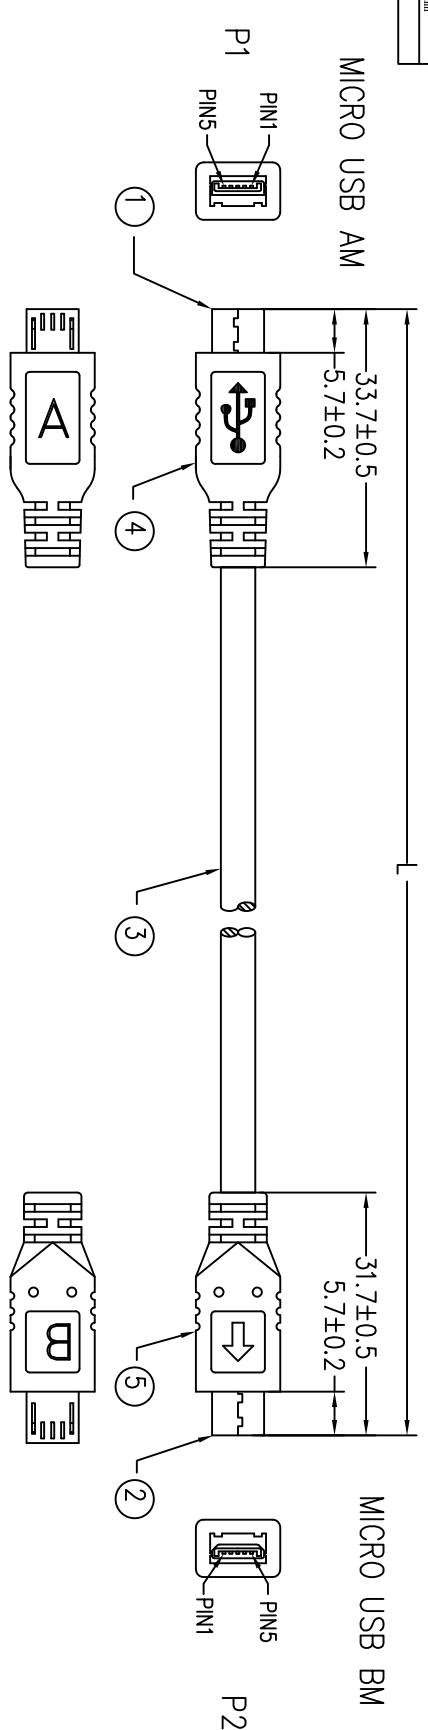

NOTE: All relevant materials are complied with RoHS directive .

No.	DESCRIPTION	Q'TY	Supplier
5	MOULDED PE COLOR TRANSPARENT		M280
	MOULDED PVC BLACK		M304
4	MOULDED PE COLOR TRANSPARENT		M280
	MOULDED PVC BLACK		M304
3	USB 2.0 CABLE, UL STYLE 1 TWISTED PAIR 28AWG AND 2C 26AWG, AMA BRAID SHIELDING WITH DRAIN WIRE, OD 4.5mm, JACKET BLACK, DRAINING No.EUAB2801P2602C-190	1-20mm	M304
2	MICRO USB B MALE 2.0, GOLD PLATING 30u" CONTACTS, BLACK INSULATOR	1	M108
1	MICRO USB A MALE 2.0, GOLD PLATING 30u" CONTACTS, WHITE INSULATOR	1	M108

REV	DESCRIPTION	DATE	CHK. BY	APPROVED

Cabletree Industrial Co., Ltd.

CUST: KND	CUST P/N: -
UNIT SCALE: 1:1	PERPECTIVE:
DWN. BY: MARK	CHK. BY: KELLY
TITLE: MicroUSB-AM to MicroUSB-BM	
CT P/N: 9G08	
APPROVER	DATE: FEB/04/2009
REV: A	SHEET: 1 OF 1