


WIRE CALIBRE TOLERANCE	MACHINING TOLERANCE			
	TOLERANCE	DIMENSION L (mm)		
L (INCH)	±	A	B	C
1/4	0.25	1.5	0.10	0.15
4/12	0.5	5.0	0.15	0.20
12/36	1	15.0	0.20	0.25
36/60	1.5	30.0	0.25	0.33
60/80	2	50.0	0.30	0.40
80/120	2.5	70.0	0.35	0.48
120/180	3	90.0	0.40	0.58
180/L	4	120.0	0.45	0.65


STRIPPED/EXTENDED
BASE COPPER
0.25*(6.5mm±1mm)

REV	DESCRIPTION	DATE	CHK. BY	APPROVED

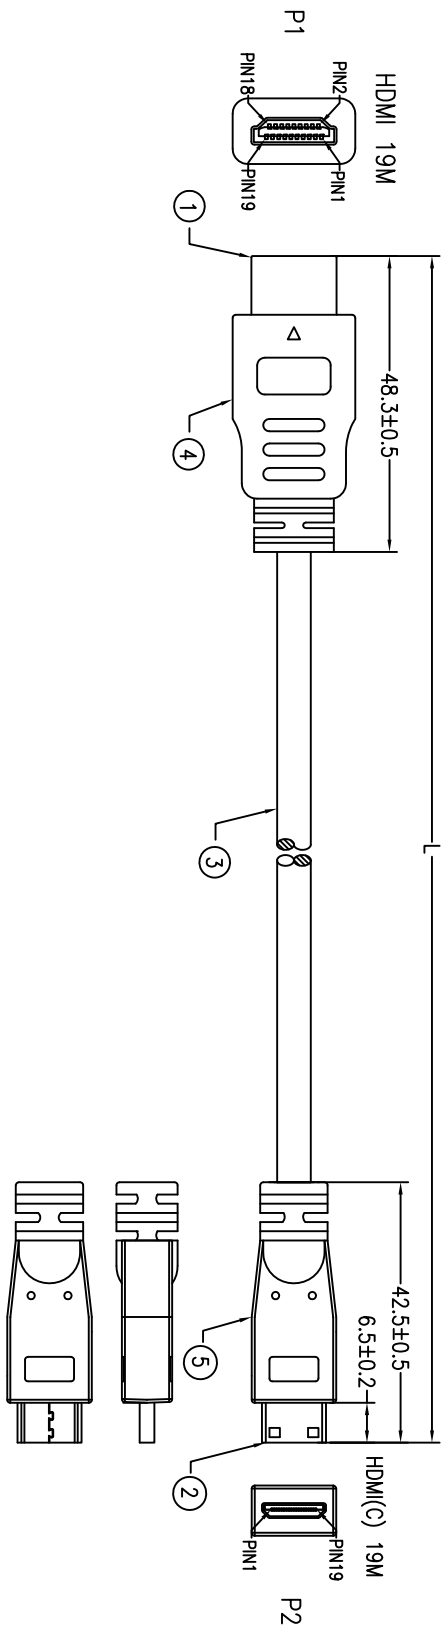

NOTE: All relevant materials are complied with RoHS directive .

No.	DESCRIPTION	Q'TY	Supplier
1	BLACK HEAT SHRINK TUBE ϕ 2.5*4mm	4	M959
2	BLACK HEAT SHRINK TUBE ϕ 0.8*5mm*4pcs & ϕ 0.8*12mm*1pcs	5	M959
3	BLACK HEAT SHRINK TUBE ϕ 2.0*2mm	4	M959
4	ALUMINUM FOIL 17*50mm	1	M579
5	MOLDED PE COLOR TRANSPARENT	1	M280
6	MOLDED PVC BLACK	1	M304
7	BLACK HEAT SHRINK TUBE ϕ 0.8*20mm	4	M959
8	BLACK HEAT SHRINK TUBE ϕ 2.5*8mm	4	M959
9	ALUMINUM FOIL 25*60mm	1	M579
10	MOLDED PE COLOR TRANSPARENT	1	M280
11	MOLDED PVC BLACK	1	M304
12	U20276 [(30MM*3P)0.4*1.4*0.4M]*4*0.3+[(30MM*3P)0.4*1.4*0.4M]4*0.3+[(30MM*3P)0.4*1.4*0.4M]4*0.3+[(30MM*3P)0.4*1.4*0.4M]4*0.3	1	M304
13	HDM(C) 19 MALE, GOLD FLASH ON CONTACTS & GOLD CONNECTOR, BLACK INSULATOR	1	M970
14	HDM 19 MALE, GOLD FLASH ON CONTACTS & GOLD CONNECTOR, BLACK INSULATOR	1	M24

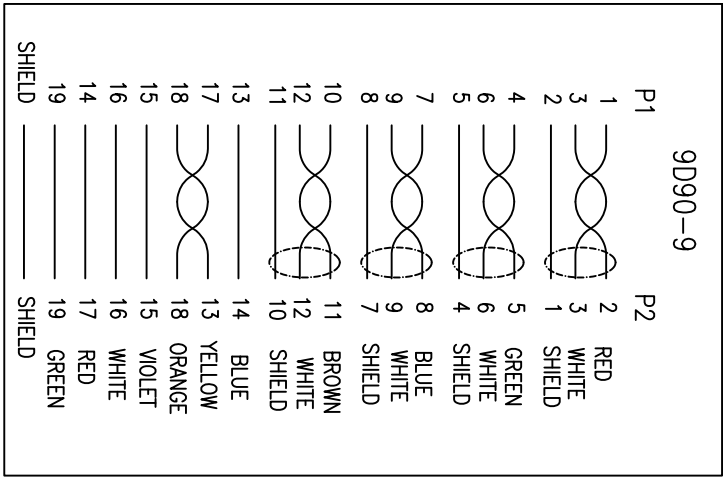

Cabletree Industrial Co., Ltd.

CLST: KND	CLST P/N: -
UNIT SCALE	PERSPECTIVE
mm 1:1	
DATE	REV
SEP/03/2012	A
APPROVER	SHEET
	1 OF 1