


DIMENSION	TOLERANCE		MACHINING TOLERANCE			
	L (INCH)	F	L (mm)	A	B	C
1.5 ≤ L < 4	0.25		1.5 ≤ L < 5	0.10	0.15	0.20
4 ≤ L < 12	0.5		5 ≤ L < 15	0.15	0.20	0.25
12 ≤ L < 36	1		15 ≤ L < 30	0.20	0.25	0.34
36 ≤ L < 60	1.5		30 ≤ L < 50	0.25	0.33	0.45
60 ≤ L < 80	2		50 ≤ L < 70	0.30	0.40	0.55
80 ≤ L < 120	2.5		70 ≤ L < 90	0.35	0.48	0.62
120 ≤ L < 180	3		90 ≤ L < 120	0.40	0.58	0.68
180 ≤ L	4		120 ≤ L	0.45	0.65	0.75


STRIPPED&TINNED
BARRE COPPER
0.25T (0.5mm) ±1mm

REV	DESCRIPTION	DATE	CHK. BY	APPROVED

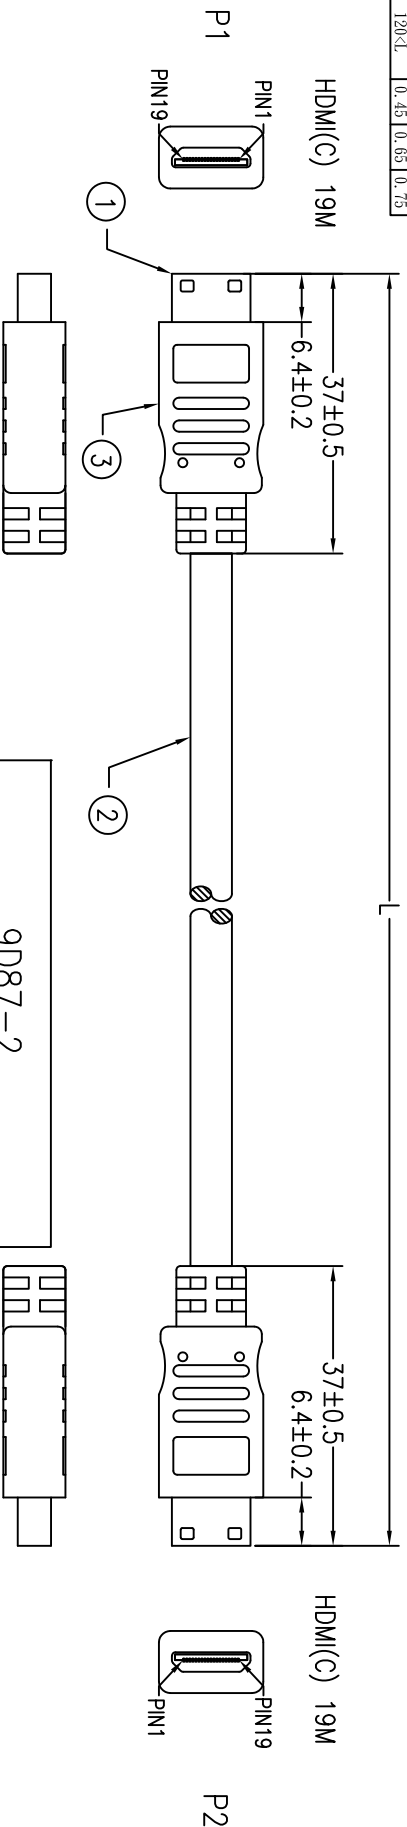

No.	DESCRIPTION	Q'TY	Supplier
1	HDMI(C) 19 MALE GOLD PLATING 15U" ON CONTRACTS WITH PCB, BLACK INSULATOR	2	M24
2	HDMI CABLE, OD 5.5mm, JACKET BLACK, DRAWING No. EMB3004P3001P3005C-447	L-10mm	M304
3	UL20276 [(30AWG*1P+0.1+L+D+M)*4P+S+(30AWG*1P+0.1)+1M+COPPER BRAID HDMI CABLE, OD 5.5mm, JACKET BLACK, DRAWING No. EMB3004P3001P3005C-447	8	M743
4	BLACK HEAT SHRINK TUBE Ø2.5*4mm	10	M743
	BLACK HEAT SHRINK TUBE Ø0.8*5mm*8pcs & Ø0.8*12mm*2pcs	8	M743
	BLACK HEAT SHRINK TUBE Ø2.0*2mm	2	M583
	COPPER FOIL 17*50mm		M280
	MOULDED PE COLOR TRANSPARENT		M304
	MOULDED PVC BLACK		

NOTE: All relevant materials are complied with RoHS directive .

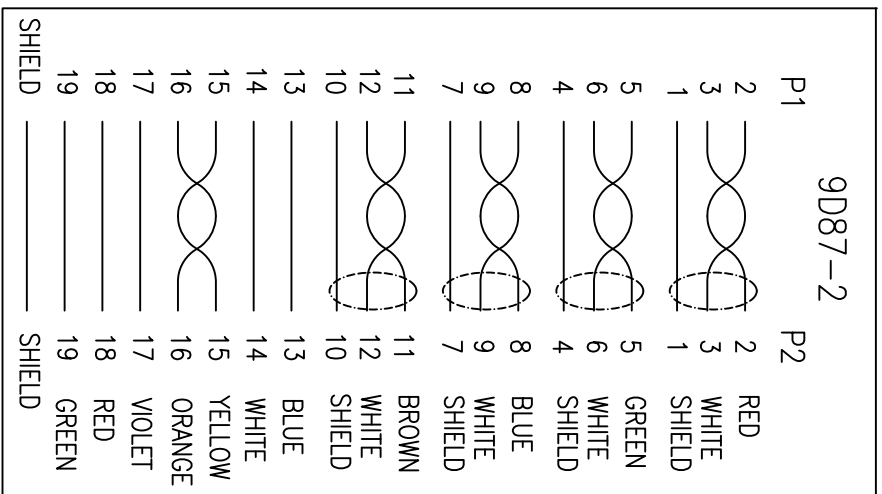

**Cabletree Industrial Co., Ltd.**

CUST: KND	CUST P/N: -
UNIT: mm	SCALE: 1:1
DRW BY: MARK	PERSPECTIVE:
CHK. BY: KELLY	CT P/N: 9D87-2
APPROVER:	DATE: AUG/05/2010
REV: A	SHEET: 1 OF 1