


WIRE CALIBRE TOLERANCE	MACHINING TOLERANCE			
	TOLERANCE	L (mm)		
L (INCH)	±	A	B	C
1/4	0.25	1.5	0.10	0.15
4/12	0.5	5.0	0.15	0.20
12/36	1	15.0	0.20	0.25
36/60	1.5	30.0	0.25	0.33
60/80	2	50.0	0.30	0.40
80/120	2.5	70.0	0.35	0.48
120/180	3	90.0	0.40	0.58
180/	4	120.0	0.45	0.65


STRIPPED LENGTH	
BASE COPPER	0.25*(6.5mm±1mm)

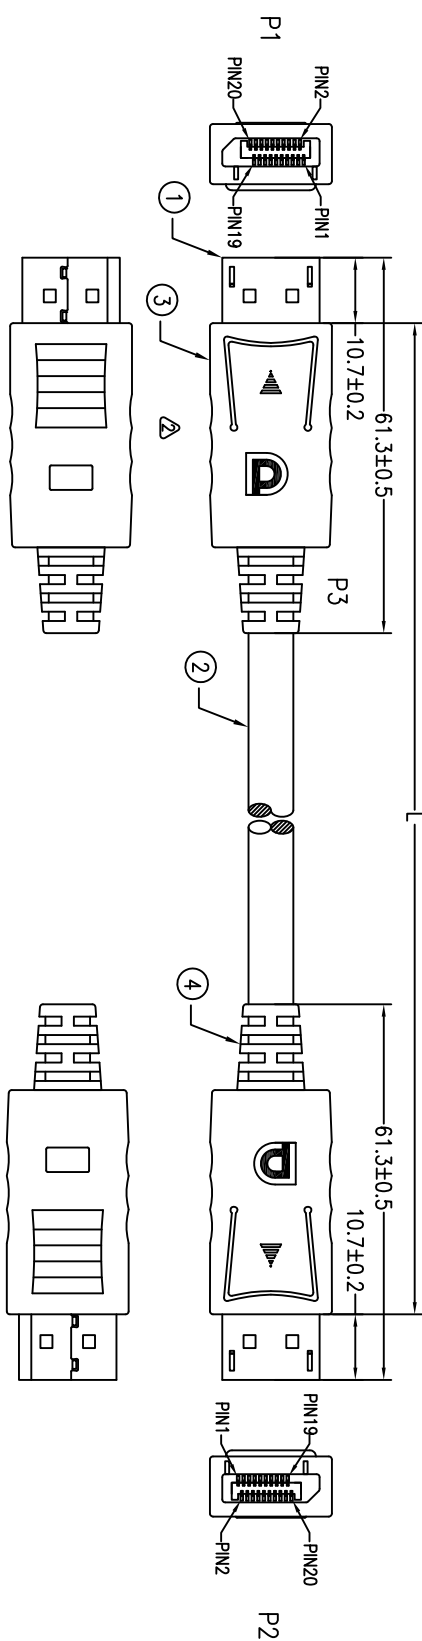

REV	DESCRIPTION	DATE	CHK. BY	APPROVED

* NTOE: All relevant materials are complied with RoHS directive .

No.	DESCRIPTION	QTY	Supplier
1	DISP LAMP 20PIN PLUG, GOLD FLASH ON CONTACTS & GOLD CONNECTOR, BLACK INSULATOR, PCB ASSEMBLY TYPE(62S020P-3014-E1-P2PB)	2	M24
2	UL20276 (28AWG*1PR+D+AL/MYLAR)*5+28AWG*4C+AL/MYLAR+BRAID, OD 7.3mm, JACKET BLACK, IMPEDANCE: 100 Ohm	L-20mm	M299
3	DISP LAMP 20PIN PLASTIC HOOD BLACK	2set	M24
4	MOLDED PVC BLACK	10	M304
	BLACK HEAT SHRINK TUBE Ø2.5*8mm	10	M743
	COPPER FOIL 24*60mm	2	M309
	COPPER FOIL 7.5*40mm	2	M309
	MOLDED PE COLOR TRANSPARENT	2	M280
	DISP LAMP 20PIN PLASTIC HOOD BLACK	2set	M24

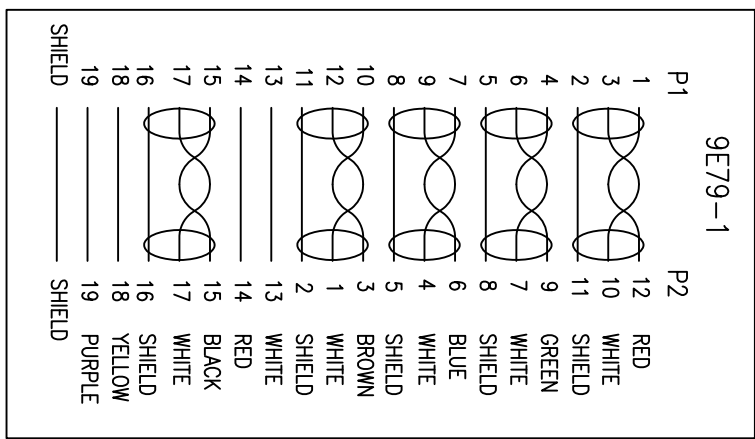

Cabletree Industrial Co., Ltd.

CLST: KND	CLST P/N: -
UNIT: mm	SCALE: 1:1
DWN. BY: MARK	CHK. BY: KELLY
APPROVER	DATE: JUN/10/2011
REV: A	SHEET: 1 OF 1

9E79-1

DISP 20M to DISP 20M