


WIRE CALIBRE TOLERANCE	MACHINING TOLERANCE			
	TOLERANCE	DIMENSION L (mm)		
L (INCH)	±	A	B	C
1/4	0.25	1.5	0.10	0.15
4/12	0.5	5.0	0.15	0.20
12/36	1	15.0	0.20	0.25
36/180	1.5	30.0	0.25	0.33
60/420	2	60.0	0.30	0.40
80/560	2.5	80.0	0.35	0.48
120/840	3	120.0	0.40	0.58
180/1260	4	180.0	0.45	0.65

STRIPPED/EXTENDED	HDMI 19F
BARE COPPER	
0.25" (6.35mm) ± 0.05	

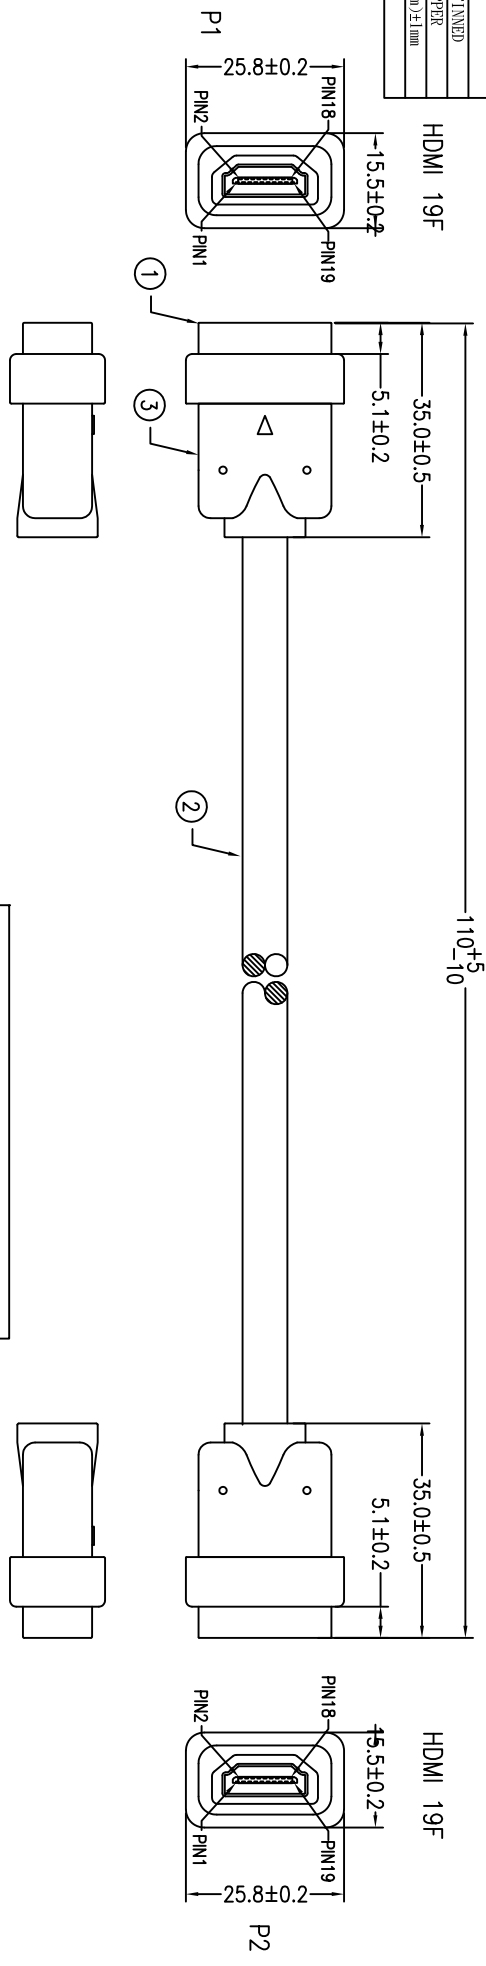


3

CABLE MARKING:
 E333339 (U) CL2 75°C.....AWM 20276 80°C 30V VW-1 CSA 204790 I/II A 80°C
 30V FT1 MSL High Speed HDMI™ Cable

NOTE: All relevant materials are complied with RoHS directive .

No.	DESCRIPTION	Q'TY	Supplier
1	HDMI 19 FEMALE, GOLD FLASH ON CONTACTS & GOLD CONNECTOR, BLACK INSULATOR, WITH PCB	2set	M363
2	UL20276(CL2) [28AWG*1Pair+4+D+M]*4Pcs+1(28AWG*5C)]HMM-HB, HDMI CABLE, OD 7.5mm, PVC(CL2)JACKET BLACK,(FLAME RATING:CL2), DRAWING No. EAMB2804P2801P2805C-415	85mm	M304
3	BLACK HEAT SHRINK TUBE Ø2.5*10mm	8	M959
	BLACK HEAT SHRINK TUBE Ø0.8*10mm	8	M959
	COPPER FOIL 17*60mm	2	M309
	MOLDED PE COLOR TRANSPARENT		M280
	MOLDED PVC WHITE(W26)		M304

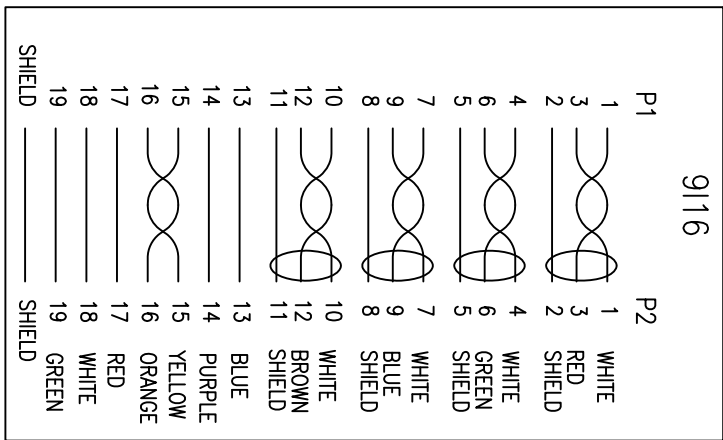

4

Cabletree Industrial Co., Ltd.

CLST: KND	CLST P/N: -
UNIT SCALE: 1:1	PERSPECTIVE
DATE: MAY/10/2012	REV: 1 OF 1
CHK. BY: KELLY	APPROVER
TITLE: HDMI 19F to HDMI 19F	CT P/N: 9116