



DIMENSION	WIRE CALIBRE TOLERANCE		MACHINING TOLERANCE		
	TOLERANCE	L (mm)	A	B	C
L (INCH)	±				
1.5<L<4	0.25	1.5<L<5	0.10	0.15	0.20
4<L<12	0.5	5<L<15	0.15	0.20	0.25
12<L<36	1	15<L<30	0.20	0.25	0.34
36<L<60	1.5	30<L<50	0.25	0.33	0.45
60<L<80	2	50<L<70	0.30	0.40	0.55
80<L<120	2.5	70<L<90	0.35	0.48	0.62
120<L<180	3	90<L<120	0.40	0.58	0.68
180<L	4	120<L	0.45	0.65	0.75

STRIPPED/EXPOSED LENGTH	
BARE COPPER	0.25" (6.5mm) ± 0.1mm

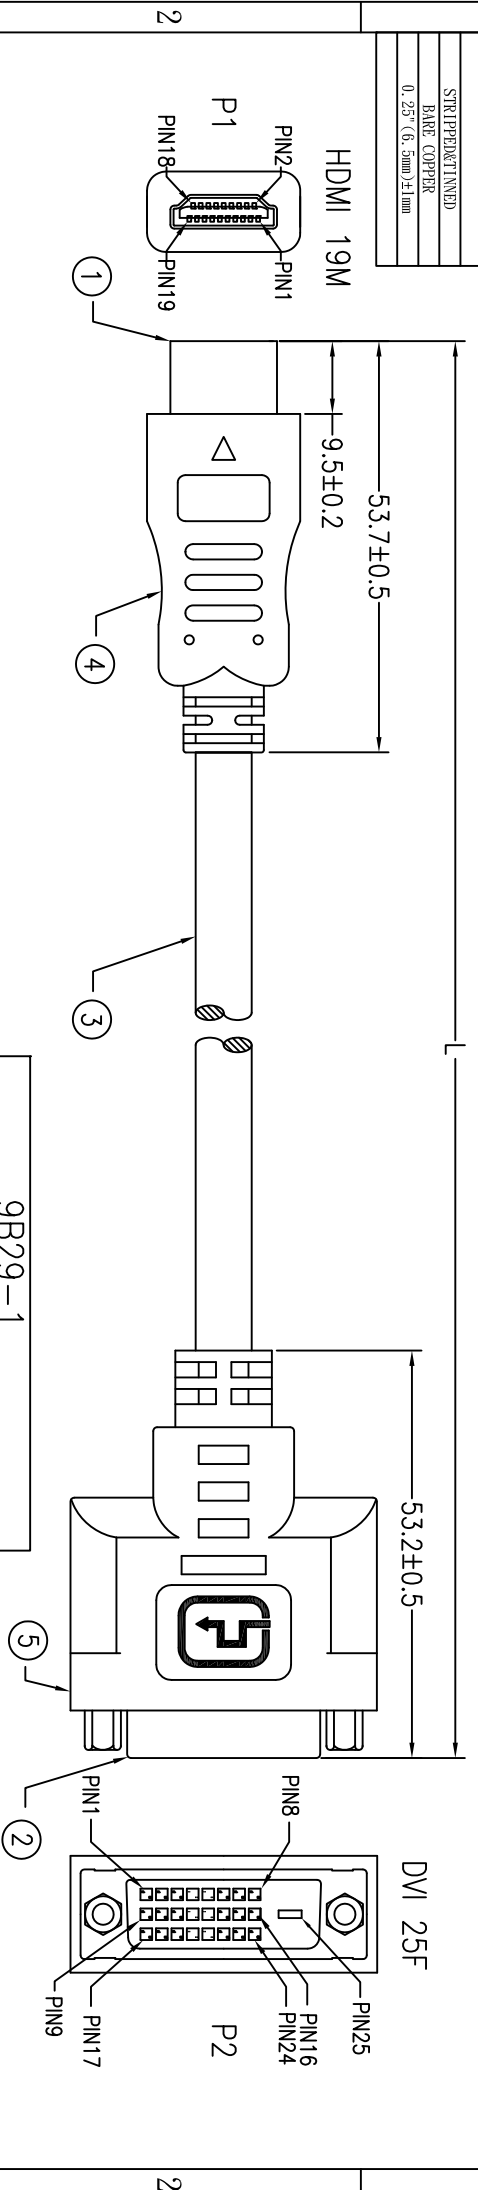

NOTE: All relevant materials are compiled with RoHS directive .

No.	DESCRIPTION	Q'TY	Supplier
1	BLACK HEAT SHRINK TUBE ϕ 2.0*4mm	4	M743
2	BLACK HEAT SHRINK TUBE ϕ 1.5*2mm	4	M743
3	BLACK HEAT SHRINK TUBE ϕ 0.8*5mm	4	M743
4	COPPER FOIL 33*90mm	1	M583
5	MOULDED PE COLOR TRANSPARENT		M280
	MOULDED PVC BLACK		M304
	BLACK HEAT SHRINK TUBE ϕ 0.8*20mm	4	M743
	BLACK HEAT SHRINK TUBE ϕ 2.5*8mm	4	M743
	COPPER FOIL 33*60mm	1	M583
4	MOULDED PE COLOR TRANSPARENT		M280
	MOULDED PVC BLACK		M304
3	UL20276 [(28AWG*1Pair+AL+D+M)*4Pcs+(28AWG*1Pair)+(28AWG*3C)]+AM+AMA BRAID, DM CABLE, OD 7.3mm, JACKET BLACK, DRAWING No. EMB2804P2801P2803C-289	L-110mm	M304
2	DV25 FEMALE(HEX-NUT 4.75*5.5mm*2PCS, GOLD PLATED), GOLD FLASH ON CONTACTS & GOLD CONNECTOR, BLACK INSULATOR	1	M105
1	HDMI 19 MALE, GOLD PLATING 15 μ " ON CONTACTS & GOLD CONNECTOR, BLACK INSULATOR(51S019P-324F-B-SF)	1set	M24

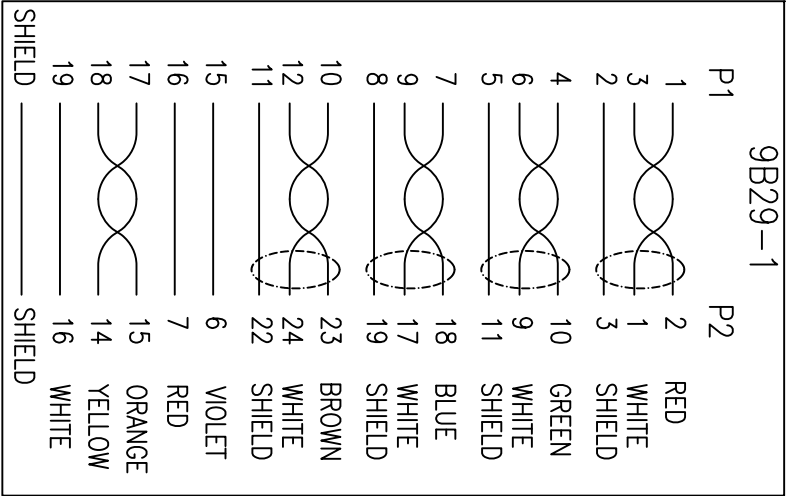

REV	DESCRIPTION	DATE	CHK. BY	APPROVED

Cabletree Industrial Co., Ltd.

CLST: KIND	CLST P/N: -
UNIT SCALE	TITLE: HDMI 19M to DVI 25F
mm 1:1	CT P/N: 9B29-1
DRN. BY MARK	CHK. BY KELLY
APPROVER	DATE OCT/18/2010
REV A	SHEET 1 OF 1