



WIRE CALIBRE TOLERANCE		MACHINING TOLERANCE		
DIMENSION	TOLERANCE	DIMENSION	TOLERANCE	
L (INCH)		L (mm)	A	B C
L1/4	± 0.25	L1/5	0.10	0.15 0.20
4<L<12	0.5	5<L<15	0.15	0.20 0.25
12<L<36	1	15<L<30	0.20	0.25 0.34
36<L<60	1.5	30<L<50	0.25	0.33 0.45
60<L<80	2	50<L<70	0.30	0.40 0.55
80<L<120	2.5	70<L<90	0.35	0.48 0.62
120<L<180	3	90<L<120	0.40	0.58 0.68
180<L	4	120<L	0.45	0.65 0.75

STRIPEDEXTAINED
BASE COPPER
0.25" (6.5mm) ± 0.01mm

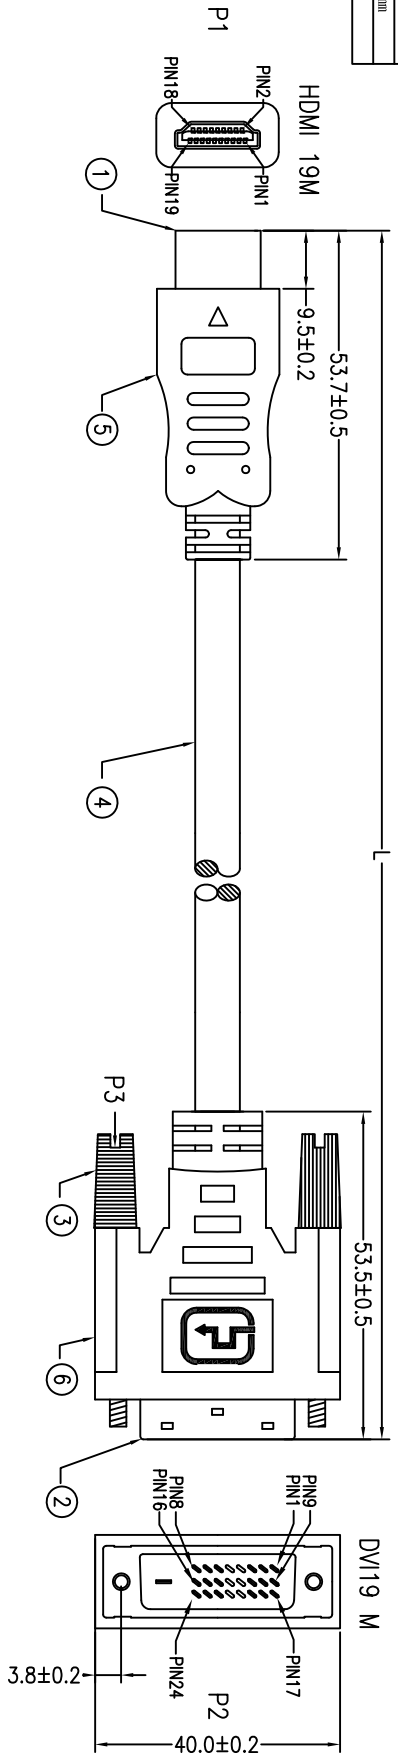

NOTE: All relevant materials are complied with RoHS directive .

No.	DESCRIPTION	Q'TY	Supplier
1	UL1061 28AWG INSULATOR WIRE, LENGTH 28mm, DRAWING No.EH002601C-013	1	M304
2	BLACK HEAT SHRINK TUBE Ø0.8*4mm	4	M743
3	BLACK HEAT SHRINK TUBE Ø1.0*20mm	1	M743
4	BLACK HEAT SHRINK TUBE Ø1.5*2mm	4	M743
5	BLACK HEAT SHRINK TUBE Ø2.0*4mm	4	M743
6	BLACK HEAT SHRINK TUBE Ø2.5*4mm	4	M743
7	ASSEMBLY PVC BOOT, COLOR BLACK	1	M935
8	BLACK HEAT SHRINK TUBE Ø2.0*5mm	4	M304
9	BLACK HEAT SHRINK TUBE Ø2.0*5mm	4	M743
10	BLACK HEAT SHRINK TUBE Ø0.8*5mm	4	M743
11	BLACK HEAT SHRINK TUBE Ø2.5*4mm	4	M743
12	COPPER FOIL 33*60mm	1	M309
13	MOLDED PE COLOR TRANSPARENT	1	M280
14	MOLDED PVC BLACK	1	M304
15	UL20276 [(28AWG*1Pair+1A+D+MY)*4Es+(28AWG*1Pair)+(28AWG*3C)]+1A+1B DVI CABLE, OD 7.3mm, JACKET BLACK, DRAWING No. EAAB2804P2801P2803C-286	L-15mm	M299
16	MOLDED THUMBSCREW #4-40, LENGTH 44.25mm, BLACK	2	M95
17	DVI19 MALE, GOLD PLATED ON CONTACTS, BLACK INSULATOR	1	M108
18	HDMI 19 MALE, GOLD PLATING 15u" ON CONTACTS, BLACK INSULATOR (51S019P-32NF-B-SE)	1set	M24

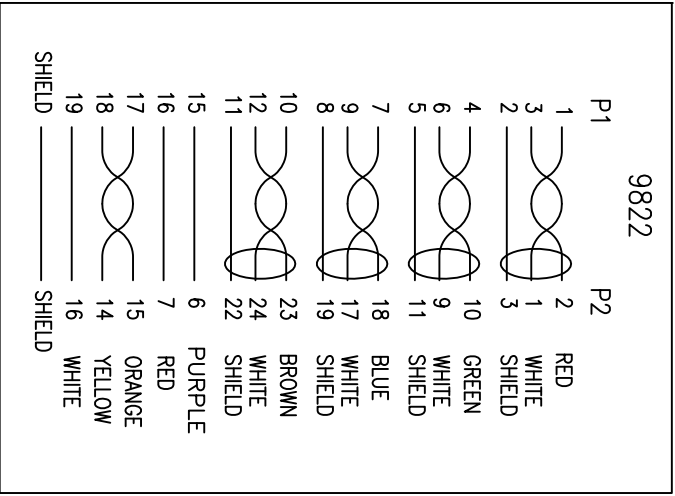

REV	DESCRIPTION	DATE	CHK. BY	APPROVED

Cabletree Industrial Co., Ltd.

CLST: KIND CLST P/N: -

UNIT SCALE PERSPECTIVE TITLE: HDMI 19M to DVI 19M

mm 1:1 CT P/N: 9822

DWN. BY: MARK CHK. BY: KELLY APPROVER: DATE: JUL/06/2011 REV: A SHEET: 1 OF 1